




# EMIS-MAIL

## LETTER BOMB AND IED DETECTOR FOR MAIL AND PARCEL INSPECTION

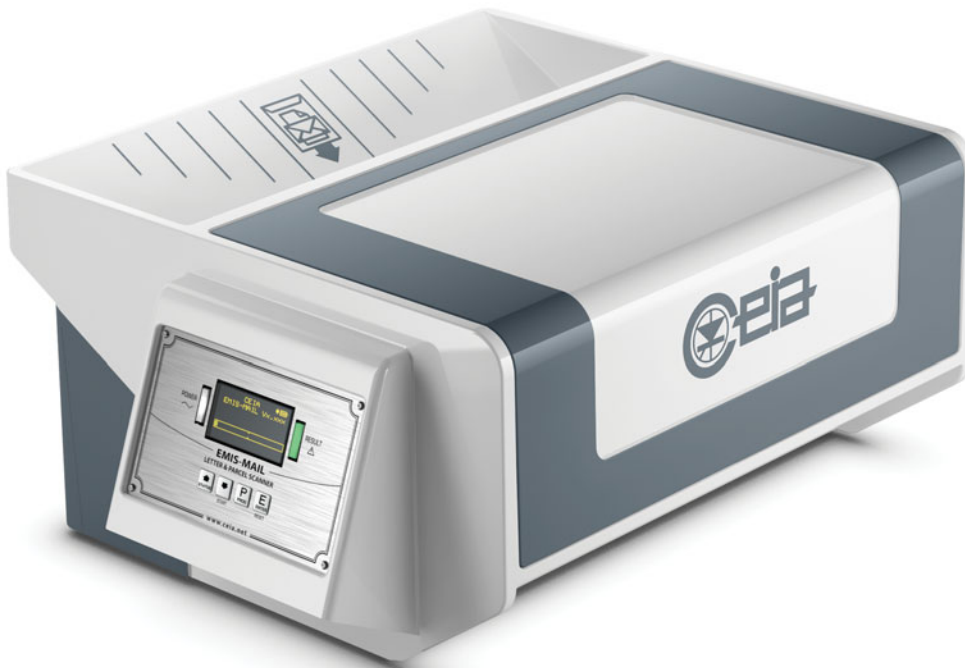


- Automatic inspection of parcels and letters up to 18" in width and 3" thickness
- Detection of detonators, batteries, trigger circuits and other metal components of parcel bombs
- No alarm on metal staples, paper-clips and metal binding spirals
- Operates on the mains power supply and with built-in NiMH rechargeable batteries

- Ergonomic, compact design
- Confirmation of signal [OK/ALARM] for each package inspected
- Integrated battery charger
- No calibration or periodic maintenance required
- Optional embedded detector of radioactive materials



According to EU Reg. 185/2010  
on mail security inspection



**GSA** Contract Holder

Scan QR code to see  
the EMIS-MAIL video



[www.ceia-usa.com](http://www.ceia-usa.com)

*Threat Detection through Electromagnetics*

CEIA USA reserves the right to make changes, at any moment and without notice, to the models (including programming), their accessories and options, to the prices and conditions of sale

## SPECIFICATIONS

<b>FEATURES</b>	High inspection speed	
	No alarm on metal staples, paper-clips and metal binding spirals	
	Digital programming with high-resolution OLED graphic display	
	Optical and acoustic alarm signaling	
	Integrated autodiagnosis system	
	Permanent memory storage of operating parameters without back-up batteries	
	Independent operation, with mains power supply or incorporated batteries	
	Specific Settings available for Prison parcels inspection (Dept. of Justice requirements)	
Compliant with NIJ-0602.02 Dept. of Justice Detection requirements		
<b>STRUCTURE</b>	Transit opening	18" x 3" (450 mm x 75 mm)
	Degree of protection	IP40
<b>DIMENSIONS</b>	WxDxH: 18.1" x 22" x 10" (450 mm x 565 mm x 250 mm)	
<b>WEIGHT</b>	35 lbs (16 kg)	
<b>POWER SUPPLY</b>	Voltage	100-240 V- single-phase – 50/60 Hz with external AC/DC adapter
	Current	1.07 A max
	Battery operation	6 x 1.2V NiMH size D incorporated
		Battery life: 12 hours (8 hours with IXC module)
	Battery-charger incorporated: Recharging time 6 hours	
<b>PROGRAMMING</b>	Type	Local: via integrated keypad
		Remote: via Bluetooth, RS232
	Data Logger Memory capacity	10,000 events
<b>SIGNALING</b>	Acoustic	Internal buzzer
	Optical	High-contrast OLED graphic display with bar-graph indication
	LED indicators on the control panel	RED: Alarm, Autodiagnosis GREEN: OK, Power supply BLUE: Alarm, detection of radioactive substances
<b>SECURITY/ SAFETY</b>	Access to programming protected by password	
	Insulation from mains voltage	
<b>COMMUNICATION</b>	Incorporated Bluetooth (FCC ID: QOQWT12 - IC:5123A-BGTWT12A) interface, RS232	
<b>ENVIRONMENTAL DATA</b>	Temperature	Operating 14°F to 122°F (-10 to +50 °C)
		Storage -13°F to 140°F (-25 to +60 °C)
	Relative humidity	5 to 90 %, without condensation
<b>CONFORMITY*</b>	Safety	UL61010-1 Safety requirements for electrical equipment for measurement, control and laboratory use - Part 1: General requirements
	EMC	EN61000-6-1:2007 Electromagnetic Compatibility (EMC) – Part 6-1: Generic standards – Immunity for residential, commercial and light-industrial environments ACGIH, 2012 Threshold Limit Value (TLV) for "Sub-Radiofrequency (30 kHz and below) Magnetic Fields" IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz RPB-SC18, 1976: Recommended safety procedures for the selection, installation and use of active metal detectors, Health Canada

\*Test Reports available upon request

NATO STOCK NUMBER 6665150105807

## ACCESSORIES / OPTIONS

### GAMMA RADIATION DETECTION Code 67197

A detector of radioactive sources can be included on demand. The gamma alarm indication includes the activity level (low/medium/high) and the CPS value (counts per second). Analysis time: 5 seconds


### IXC MODULE Code 66751

- Integrated Web-server
- 100base-T Ethernet
- Full Speed USB interface
- Wi-Fi 802.11b/g

### EMIS-MAIL MOBILE STATION Code 76332

- Robust Stainless-Steel Cart, specially designed for optimal use of EMIS-MAIL.
- Includes up to three Plastic Boxes for mail collection.
- Wheels and locking brakes allow comfortable mobile deployment.

- 1 Plastic box for mail and parcels collection
- 2 Service/replacement box (3 Pcs.)
- 3 Seat reference test samples PASS / NO PASS
- 4 AISI 304 frame
- 5 Frame protection
- 6 Floating wheels + brake (4)

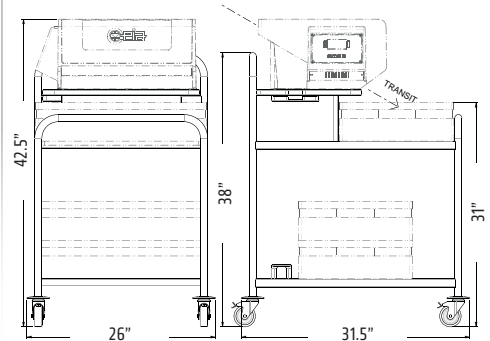

www.ceia-usa.com

CEIA USA Ltd - 9155 Dutton Drive, Twinsburg OHIO - 44087 USA  
Phone: 330-405 3190 • Fax: 330-405 3196 • E-mail: security@ceia-usa.com • Call 1-888-532-CEIA

CEIA USA reserves the right to make changes, at any moment and without notice, to the models (including programming), their accessories and options, to the prices and conditions of sale