



## 622XR RAPISCAN

FEATURE-RICH X-RAY BAGGAGE INSPECTION SYSTEM FOR SCREENING LARGE CARRY-ON BAGGAGE AND PARCELS AT THE CHECKPOINT

- ▶ LARGE BAGGAGE AND PARCEL SCREENING
- ▶ ADJUSTABLE CONTROL PANEL
- ▶ NETWORK ENABLED
- ▶ PERFORMANCE AND VALUE

### STANDARD FEATURES

- Multi energy imaging (4 Color)
- View previous/next bag
- Image archive
- Configurable image processing keys
- Baggage counter
- Date / time display
- Search indicator
- UPS (Uninterrupted Power Supply)
- Multi language support
- Flat panel monitor

### STANDARD IMAGE PROCESSING FUNCTIONS

- Crystal clear™
- Black and white
- Organic / inorganic stripping
- Inverse video
- High penetration
- Pseudo color
- Low penetration
- Variable edge enhancement
- Variable color stripping
- Variable gamma
- Variable density
- Dynamic continuous zoom & panning
- Fixed zoom (64x)



TUNEL OPENING (WXH) :  
750 x 550 mm (29,5 x 21,7 IN)

THE **RAPISCAN 622XR** OFFERS HIGH PERFORMANCE THREAT DETECTION AND LOWER TOTAL COST OF OWNERSHIP WITH A TUNNEL OPENING OF 750MM X 550MM, THE RAPISCAN 622XR CAN ACCOMMODATE A RANGE OF PARCEL AND BAGGAGE SIZES FOR CHECKPOINTS.

The 622XR's innovative design allows for bidirectional operation, while its dual-energy detection provides material discrimination alert so that screeners can identify the material composition of the scanned object. In addition, it offers options like an adjustable control panel stand and swing-open, easy-access panels.

### DETECTION OF EXPLOSIVES AND NARCOTICS ALERT

Target™ and NARCScan™ are designed to assist operators in the detection of a range of explosives and narcotics respectively in real time during the scanning process by marking a potential threat on the X-ray image. Rapiscan detection algorithms are based on regulatory material analysis techniques.

### EASE OF USE PROVIDING HIGHEST THROUGHPUT

With over 14 image processing tools and detection alert algorithms the feature-rich software allows the operator to more easily and accurately search for contraband.

### REGULATORY COMPLIANCE

Rapiscan 622XR performance is in full compliance with the European Union regulations (EC) No.300/2008, (EU) No.2015/1998 and Commissions Decision C (2015) 8005 for aviation security.





## 622XR RAPISCAN

### PHYSICAL SPECIFICATIONS

Dimensions:	Length: 2,282 mm (89.8 in.) Width: 1,030 mm (40.6 in.) Height: 1,467 mm (57.8 in.)
Tunnel size:	750 mm (W) x 550 mm (H) (29.5 x 21.7 in.)
Conveyor speed:	0.20 m/sec (39.4 ft./min)
Conveyor load (Max):	165 Kg (364 lbs)
Conveyor height (Approx.):	788 mm (31.0 in.)
Weight (Approx.):	Net: 610 Kg (1,345 lbs)
System power:	115/230 VAC +10%, 60/50Hz

### X-RAY GENERATOR AND IMAGE PERFORMANCE<sup>(1)</sup>

Steel penetration:	28 mm standard; 30 mm typical
Resolution:	38 AWG standard; 40 AWG typical
Cooling:	Sealed oil bath with forced air
Anode voltage:	Operating at 140kV
Tube current:	0.7 mA
Orientation:	Vertically upward

### OPERATING ENVIRONMENT

Storage temperature:	-20°C to 50°C
Operating temperature:	0°C to 40°C
Relative humidity:	5 to 95% non-condensing

### PROTECTION CLASS


System:	IP20
Operator control panel:	IP43 <sup>2</sup>

### GOVERNMENT REGULATORY

TSA Air Cargo Screening Technology List (ACSTL) Qualified  
 Regulation (EC) No. 300/2008 Compliant  
 Regulation (EU) No. 2015/1998 Compliant  
 EU Commissions Decision (EU) C(2015) 8005 Compliant  
 French Civil Aviation Authority (STAC) Certified  
 UK Department for Transport (DfT) TIP Approved

### HEALTH & SAFETY

Rapiscan Systems' cabinet X-ray products comply with all applicable U.S. FDA and equivalent international regulatory agency requirements, contained in the cabinet X-ray radiation safety performance standard [21 CFR 1020.40] and the general performance standard [21 CFR Part 1010] as well as IEC standard 61010-2-091. Rapiscan baggage and parcel inspection systems radiation emission leakages are well below the required regulatory limits with less than 1 µSv/hr at 10 cm from all surfaces of cabinet X-ray

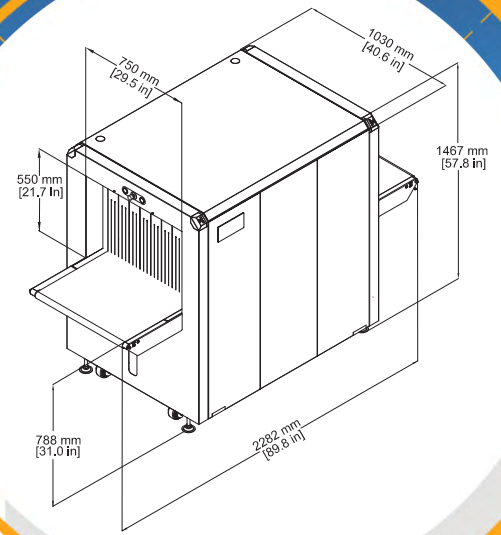

### OPTIONS AND ACCESSORIES

- Explosives detection alert (Target™)
- Narcotics detection alert (NARCScan™)
- Density threshold alert (DTA)
- Threat image projection (TIP)
- Threat image projection network (TIPNet)
- Remote image archive review (NETView™)
- Network X-ray management automation and link system (NEXLink™)
- Multi-system network display station (NDS)
- Automatic image archiving
- Enhanced image archiving
- Operator training program (OTP)
- Manual scan
- Operator pedestal
- Foot mat
- Optical operator presence sensor
- Smartcard login
- Power conditioner
- Conveyor accessories
- Remote workstation
- Adjustable height lift and tilt stand

(1) Stated performance as measured by Rapiscan Imaging Validation Test Kit.  
 (2) With optional replaceable cover.

With continual development of our products Rapiscan Systems reserves the right to amend specifications without notice. Product pictures are for general reference. Please note that due to US laws and regulations, not all Rapiscan products are available for sale in all countries without restriction. Please contact your Rapiscan Systems sales representative for more information.

### HTDS

Parc d'Activités du Moulin de Massy - 3 rue du Saule Trapu  
 BP246 - 91882 Massy Cedex France  
 Tel : +33 (0) 1 64 86 28 28 - Fax : +33 (0) 1 69 07 69 54 - info@htds.fr - www.htds.fr

HTDS Algeria: +213 232 384 01/02      HTDS Morocco: +212 222 749 59  
 HTDS Egypt: +202 229 053 06      HTDS Lybia: +218 91 69 50 70 8  
 HTDS Madagascar: +261 34 40 664 72      HTDS Tunisia: +216 70 836 961