

Features

- AlGaIn based material
- UVC photodiode
- TO46 package
- Good solar blindness
- High responsivity and low dark current



Applications

- Ozone monitoring
- UV radiation dose measurement
- Flame detection

Specifications

Parameter	Symbol	Value	Unit
-----------	--------	-------	------

Spectral characteristics (25 °C)

Wavelength of peak responsivity	λ_{max}	275	nm
Peak responsivity (at 275 nm)	R_{max}	0.113	A/W
Spectral response range	-	250~280	nm
UV/visible rejection ratio ($R_{max}/R_{400\text{ nm}}$)	VB	$>10^3$	-


General characteristics (25 °C)

Chip size	A	1	mm ²
Dark current (1 V reverse bias)	I_d	<10	pA
Capacitance (at 0 V and 1 MHz)	C	8.6	pF
Temperature coefficient	T_c	-0.1	%/°C


Maximum ratings

Operation temperature range	T_{opt}	-40~85	°C
Storage temperature range	T_{stor}	-40~85	°C
Soldering temperature (3 s)	T_{sold}	260	°C
Reverse voltage	V_{Rmax}	10	V

Spectral response

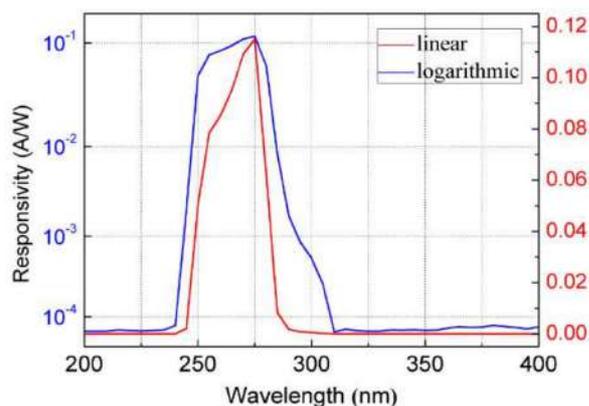

Package dimensions

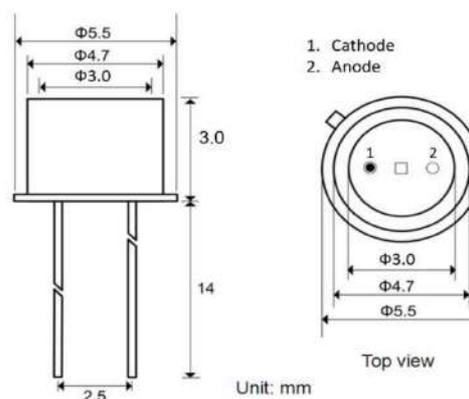

***Caution:** ESD can damage the device hence please avoid ESD.